

*EPSON Professional Media*  
**Tyvek® Brillion™**


**For use with**

EPSON Stylus® Pro 7000      EPSON Stylus Pro 7500  
 EPSON Stylus Pro 9000      EPSON Stylus Pro 9500  
 EPSON Stylus Pro 10000\*

**Product Information**

DuPont® Tyvek®-based banner material sets the standard for non-tear signage. Now comes Tyvek® Brillion™. With its enhanced smoothness, opacity, and brightness, this new standard bearer, made with Epson's proprietary coating, provides the signage industry with the ideal choice in ink jet banner media. Tyvek® Brillion™ is a non-glare, matte-finished media offering high resolution results ideal for trade show graphics without sacrificing the tough performance characteristics required for signage applications. This instant-drying product is spun-bonded polyethylene measuring in at a full 9.5 mil in thickness. It offers a life span of up to six months outdoors with the benefit of lamination. Designed for optimum use with EPSON Archival™ Ink, Tyvek® Brillion™ is the perfect combination of excellent image quality and versatility for all your signage needs. Like all of Epson's innovative media, this product is engineered to give you the highest resolution and color saturation possible. As always, EPSON supplies guarantee EPSON quality.

\* Photographic dye version and archival ink version

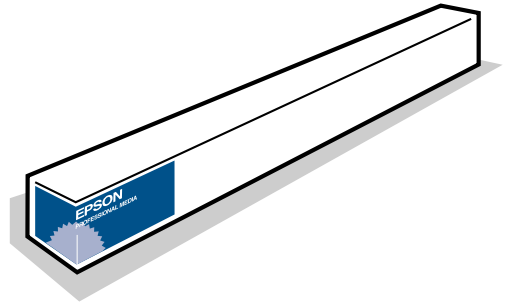

**Features/Benefits**

- Tyvek® Brillion™ features improved smoothness, opacity and brightness
- Tear resistant durability
- High resolution for outstanding image quality
- Matte surface is ideal for both indoor and outdoor applications
- Dries instantly for easy handling with Epson inks

**Feature Checklist**

Feature	Performance	Additional Comments
Indoor/outdoor usage	Both indoor and outdoor	Lamination prolongs life during outdoor usage.
Lightfastness	Six month outdoor (laminated)	Six month lightfast rating is laminated with a vinyl based UV film, and is based on accelerated testing. Actual outdoor test in progress.
	One month outdoor (unlaminated)	Actual outdoor test in progress.
Resistance to water	Good	Base is waterproof. No bleeding with water contact. Lamination will allow for use in continuous wet conditions.
Ink drying time	Immediate (less than 30 seconds)	Ink is dry to the touch. However, it takes 24 hours before it cures and becomes durable.
Lamination	Pressure sensitive, thermal, or liquid laminates	Best results are obtained with a pressure sensitive vinyl laminate. However, thermal encapsulation provides maximum water resistance.
Grommeting and hemming	Recommended for outdoor use	A 2.5" border should be left around the image to allow sufficient margin for the hem. Grommets should be located along the length of the print and pass through two layers of media, and be spaced every two feet. For sewing print should be sewn hem side up to avoid scratching. A maximum of five double locked stitches per inch is recommended.

NOTE: Actual print stability and longevity will vary according to image, display conditions, light intensity, humidity, atmospheric conditions, and post-printing treatments. Epson does not guarantee stability or longevity. For maximum print life, display all prints under glass or lamination or properly store them.



### Technical Specifications

Basis weight	130 g/m <sup>2</sup>
Thickness	9.5 mil
ISO brightness	95%
Opacity	97%
Gloss at 60°	2.8
Hot lamination	Yes
Base material	Tyvek® Spun-bonded Polyethylene
Surface finish	Matte
Core size	2"
Spindle	2" standard

### Operating Specifications

Required temperature for optimum performance	59° - 77° F 15° - 25° C
Required humidity for optimum performance	40% - 60% RH

(Note: High humidity will prolong the drying time for lamination purposes.)

### Driver Settings

Select Tyvek® as the media type setting. If Tyvek® is not available, select Synthetic Paper setting.

### Ordering Specifications (Individual Boxes)

Product Code	Product	UPC
S041494	24" x 60"	0-10343-83625-9
S041495	36" x 60"	0-10343-83626-6
S041496	44" x 60"	0-10343-83627-3

### Packaging Specifications (Individual Boxes)

Product Code	Dimensions (L x W x H)	Weight
S041494	25" x 4.6" x 4.6"	5.5 lbs
S041495	37" x 4.6" x 4.6"	7.0 lbs
S041496	45" x 4.6" x 4.6"	9.0 lbs

### MSRP\* (Per Unit)

Product Code	Product	Cost
S041494	24" x 60"	\$179
S041495	36" x 60"	\$269
S041496	44" x 60"	\$329

\*Actual prices may vary.

YOU'VE GOT TO SEE IT IN  COLOR.™

[www.epson.com](http://www.epson.com)

**Epson America, Inc.**  
3840 Kilroy Airport Way, Long Beach, CA 90806

**Epson Canada, Ltd.**  
550 McNicoll, Willowdale, Ontario M2H 2E1

**Epson Latin America**  
6303 Blue Lagoon Drive, Miami, FL 33126

Specifications are subject to change without notice. EPSON and EPSON Stylus are registered trademarks of Seiko Epson Corporation. EPSON Archival is a trademark of Epson America, Inc. All other products and brand names are registered trademarks of their respective companies. Epson disclaims any and all rights in these marks.  
Copyright © 2001 Epson America, Inc. CPD-10286 5K 4/01 CL

Printed on Recycled Paper 